

TN-5308-4PoE Series

8-port M12 IEEE 802.3af PoE unmanaged Ethernet switches



- > M12 connectors and IP40 metal housing
- > 4 IEEE 802.3af compliant PoE and Ethernet combo ports
- > Provides up to 15.4 watts at 48 VDC per PoE port
- > EN50155/50121-3-2/50121-4, NEMA TS2, and e1 compliant
- > -40 to 75°C operating temperature range (T models)



Introduction

The ToughNet TN-5308-4PoE series M12 unmanaged Ethernet switches are designed for industrial applications in harsh environments. The M12 connectors ensure tight, robust connections, and guarantee reliable operation, even for applications that are subject to high vibration and shock. The TN-5308-4PoE series Ethernet switches provide 8 fast Ethernet M12 ports with 4 IEEE 802.3af compliant PoE (Power-over-Ethernet) ports. The switches are classified as power source equipment (PSE) and provide up to 15.4 watts of power per port.

The TN-5308-4PoE switches can be used to power IEEE 802.3af compliant powered devices (PDs), eliminating the need for additional wiring. The switches support IEEE 802.3/802.3u/802/3x with 10/100M, full/half-duplex, MDI/MDI-X auto-sensing, and provide an economical solution for your industrial Ethernet network. Models with an extended operating temperature range of -40 to 75°C are also available. The TN-5308-4PoE switches are compliant with EN50155/50121-3-2/50121-4 (railway applications), NEMA TS2 (traffic control systems), and e-Mark (vehicles) requirements, making them suitable for a variety of industrial applications.

Specifications

Technology

Standards:

IEEE 802.3 for 10BaseT
IEEE 802.3u for 100BaseT(X)
IEEE 802.3x for Flow Control
IEEE 802.3af for Power-over-Ethernet

Processing Type: Store and Forward

Flow Control: IEEE802.3x flow control, back pressure flow control

Interface

M12 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode and auto MDI/MDI-X connection

LED Indicators: PWR, LNK/ACT, PoE

Power Requirements

Input Voltage: 48 VDC (46 to 50 V)

Input Current: 1.6 A @ 48 VDC

Overload Current Protection: 3 A @ 48 VDC

Connection: M12 A-coding, 5-pin male connector

Reverse Polarity Protection: Present

PoE (per port)

Max. Output Power: 15.4 W

Output Voltage: 44 to 48.5 VDC

Max. Output Current: 350 mA

Max. Overload Protection: 400 mA

Physical Characteristics

Housing: Metal, IP40 protection

Dimensions: 60 x 216.6 x 48.7 mm (2.36 x 8.53 x 1.91 in)

Installation: Panel mounting, DIN-Rail mounting (with optional kit)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Operating Humidity: 5 to 95% RH (non-condensing)

Regulatory Approvals

Safety: UL508 (Pending)

EMI: FCC Part 15, CISPR (EN55022) class A

EMS:

EN61000-4-2 (ESD), level 3

EN61000-4-3 (RS), level 3

EN61000-4-4 (EFT), level 3

EN61000-4-5 (Surge), level 3

EN61000-4-6 (CS), level 3

EN61000-4-8

EN61000-4-11

EN61000-4-12

Traffic Control: NEMA TS2 (Pending)

Rail Traffic: EN50155 (Pending), EN50121-3-2 (Pending),

EN50121-4

Note: Only panel mounting installations comply with EN50155, EN50121.

Shock: IEC61373

Freefall: IEC60068-2-32

Vibration: IEC61373


Note: Please check Moxa's website for the most up-to-date certification status.

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions (unit = mm)

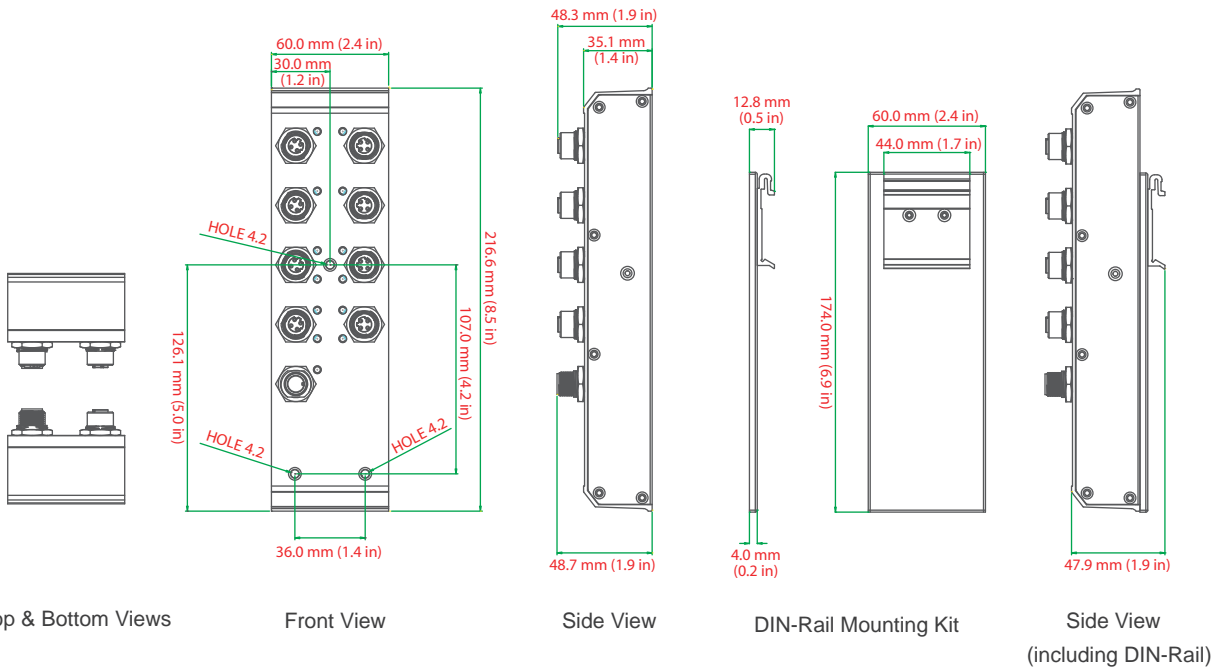

Ordering Information

Available Models		Port Interface	
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 75°C)	PoE, 10/100BaseT(X) M12 connector	10/100BaseT(X) M12 connector
TN-5308-4PoE	TN-5308-4PoE-T	4	4

Optional Accessories (must be purchased separately)

DR-75-48/DR-120-48: 75/120 W DIN-Rail 48 VDC power supplies